


ULTIMA RZ6 SET UP SHEET



Name _____ Date _____ Truck / City _____ Event _____

Front Suspension:

Shock Position:



Toe: In Out _____°

Tie Rod: _____

Front Bulkhead

Weight Placement:

- None
- Bulkhead Inside _____ 9
- On the skid plate _____ 9

- 4.8mm Ball Stud:**
- UM128(Std.)
 - UMW508(+2mm High Mount)

Upper Spacer: _____ mm



4.8mm Ball Stud Spacer: _____ mm

Caster:


- 25°
- 30°
- A (UM502)
- B (UM721/Std)
- B (UMW722/Brass)
- B (UMW723/Alu)
- C (UM567)

- Spacer:
- 0.5
 - 1.0
 - None

- Caster Block:
- 0°
 - 2°
 - 4°

AL. Steering Support:

- None
- UMW724



- Axle Spacer:**
- Out _____ mm
 - In _____ mm

- Wheel Hub:**
- UM569 / Std
 - UM506

- 4.8mm Ball Stud:**
- LA246 (-1mm Low Mount)
 - 97050M (Std)


Ackerman Steer Spacer: _____ mm

- Ackerman arrow direction:**
- Front(std)
 - Rear

Option:

- UMW701 Alu ST Plate
- UMW702 Alu Clank Arm

Bump Steer Spacer:

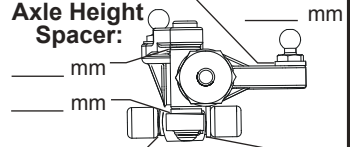

Axle Height Spacer: _____ mm

_____ mm

_____ mm

Wheelbase: F: _____ mm R: _____ mm

Comments: _____

Rear Suspension:

Shock Position:





Wing Stay Position:

Shock Stay Type:

- LA352(std)
- LAW59 (Carbom/2mmLow)

Upper Arm Position:



- Sus.Arm:**
- LA272(std)
 - UM713B

- 4.8mm Ball Stud:**
- 97050M(Std)
 - UM129


Upper Spacer: _____ mm

Camber: _____°

Upper Spacer:

_____ mm

Hub Carrier:



Type-B (UM519)

Type-B2 (UM519-2)

- 0°Type-B(UM519)
- 0°Type-B2(UM519-2)
- 0°Alu(UMW704-0)
- 0.5°Alu(UMW704-05)
- 1°Alu(UMW704-1)

Front: _____ mm Rear: _____ mm


Wheelbase:

_____ mm _____ mm _____ mm _____ mm

Lower Sus Holder Block:

Front _____ Rear _____

Toe In: _____°




Lower Sus Holder Spacer:

Front _____ mm Rear _____ mm

Sway Bar:

- None
- _____ mm



Rear Diff:

- Gear Diff. (Oil:# _____) (Oil weight: _____ g)
- Ball Diff.

Shock:

Front

Rear

Shock Piston: _____


Shock Oil: # _____ # _____

Shock Spring: _____

Limiters: in mm out mm in mm out mm

Shock Length(A): _____ mm _____ mm

Shock Top Type: Alu(UM719/Std) UM753-1



5.8mm Ball End:

Front: S M L

Rear: S M L

Body / Wing:

Body: _____

Wing Mount: Narrow Wide

Wing Dum Height: _____ mm

Wing: _____

Wing Angle: 4° 7° 10°

Lip Height: _____ mm

Material:


Screw: Steel Titanium

Pinion Gear: Steel Aluminium

Shock O-Ring: O-ring X-ring Red Clear

Chassis:

Ride Height:

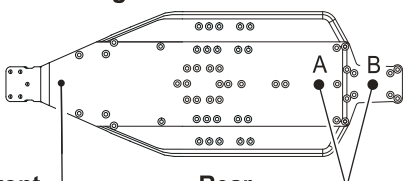

Front _____ mm

Rear A B _____ mm

Tire:

Front

Rear

Tire: _____

Inserts: _____

Wheel: _____

Traction Compound: _____

Comment : _____

Electronics:

Battery:

- Saddle Pack Short

Battery Position:

- Std 8mm Front

Motor Position:


- Front Rear

Motor Mount Position:

- Std 8mm Front



前 Front



Motor: _____

Pinion/Spur: _____ / _____